


CORAL & CORAL LINES





CORAL / CORAL LINES 58342

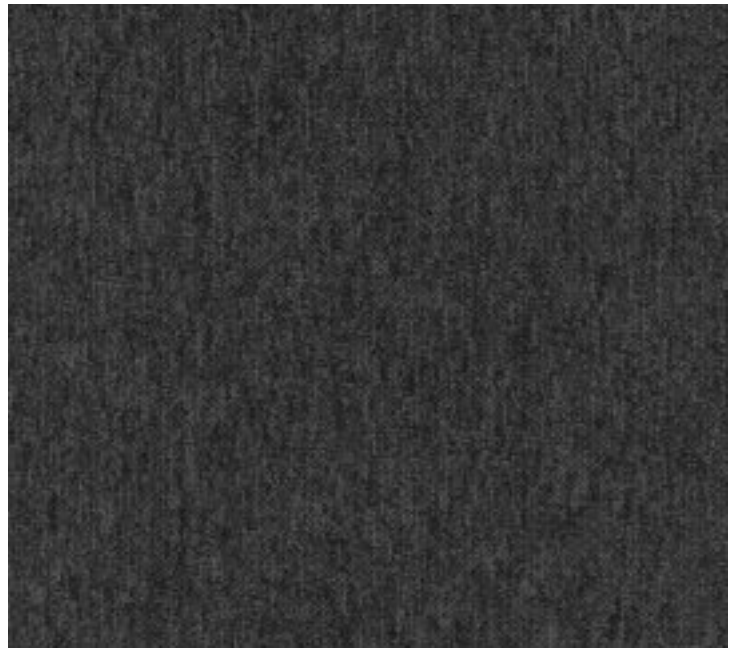


CORAL / CORAL LINES 58350




CORAL / CORAL LINES 58351



CORAL / CORAL LINES 58360

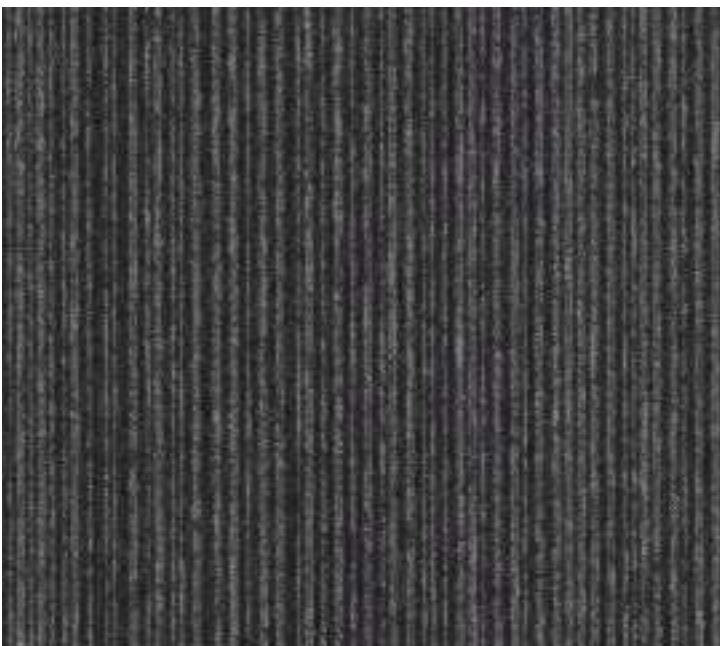

CORAL / CORAL LINES 60340

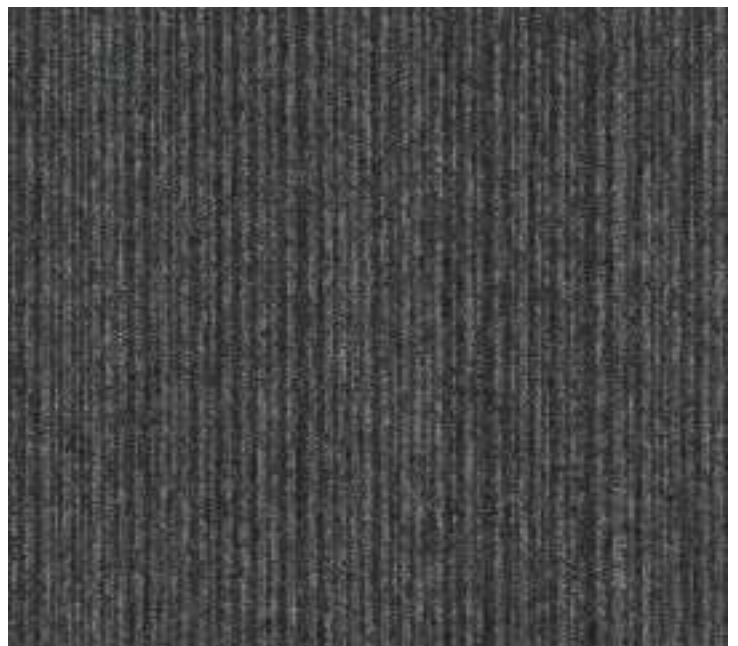

CORAL / CORAL LINES 60345

Technical details carpet tiles

Manufacturing type		tufted 1/10"		
Construction		loop pile		
Pile composition		100% PA 6 BCF		
Dye method		solution dyed		
Primary backing		polyester fleece		
Secondary backing		bitumen		
Pile weight	ISO 2424	g/m2	485	(+/-)
Total weight	ISO 8543	g/m2	4.200	(+/-)
Pile height	ISO 1766	mm	3,0	(+/-)
Total height	ISO 1765	mm	5,5	(+/-)
Tuft density	ISO 1763	/m2	175.000	(+/-)
Size		cm	50 x 50	
Packing			20 per box	5 m2
Classification	EN 1307		33	heavy commercial
Comfort rating	EN 1307		LC 1	
Castor chair	EN 985		A	intensive
Dimensional stability	EN 986		≤ 0,2%	
Fire resistance	EN 13501-1		Bfl-S1	loose laid
Permanent antistatic	ISO 6356	kV	≤ 2,0	
Transversal resistance	ISO 10965	Ω	≥ 10 ¹⁰	
Thermal resistance	ISO 8302	m2/K/W	0,066	
Sound absorption	ISO 354	α _w	0,15	
Impact sound reduction	ISO 10140	ΔL _w	23 dB	
	ISO 10140	ΔL	35 dB	(1000 Hz)
Colour fastness light	ISO 105 B02		≥ 8	
Rubbing fastness	ISO 105 X12		≥ 4-5	
	DIBt Nr.		Z-156.601-1467	

